


> N,S calorimeters are mounted close to the beam pipe a distance of ~7.5m east of the STAR IP.

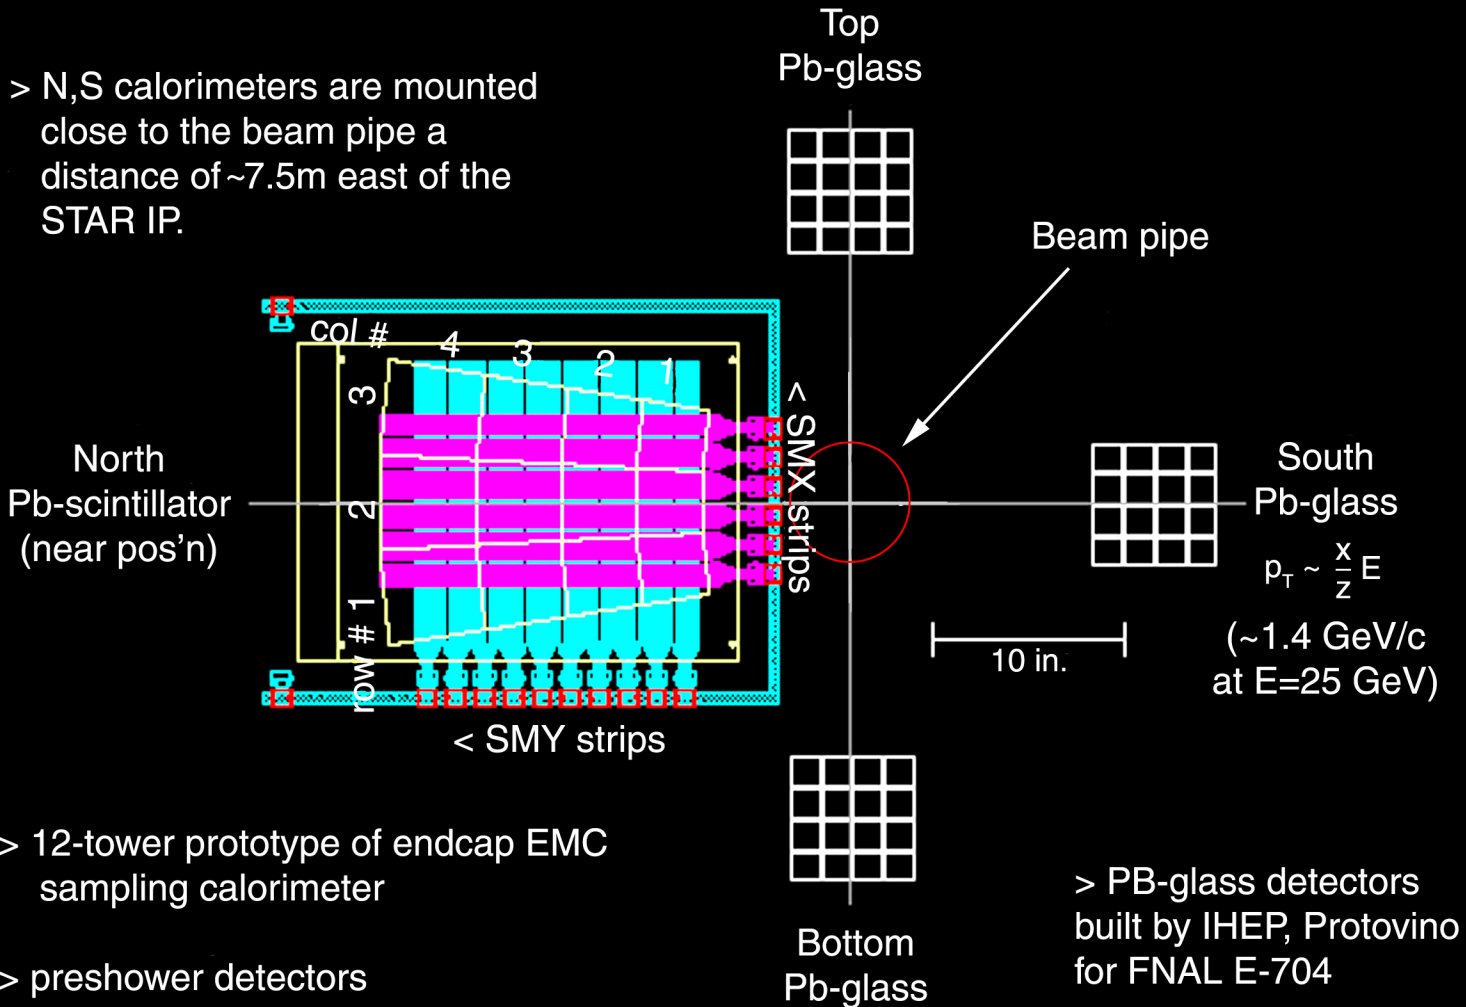

> 12-tower prototype of endcap EMC sampling calorimeter

> preshower detectors

> shower-maximum detector to measure transverse profile

> extensively tested at SLAC

> PB-glass detectors built by IHEP, Protovino for FNAL E-704

> ~18 radiation lengths

> Cerenkov detector