



TOP VIEW AFTER ROTATION OF 45°

° AROUND Z

SUPPLEMENTARY PIECE (Q2430BT135) FOR AIR FLOW WAY FROM THE INNER FIELD CAGE NEAR THE AIR TUBE LADDER. IN THE CENTRAL HOLE THERE IS A CONDUCTIVE AND SCREEN FOR IN AIR FLOW. FOR THE SSD BARREL THERE ARE 10 PIECES ON EACH RING. THE OTHER TUBES, AIR OUT TUBES, ARE CONNECT AT THE TYCON TUBES TOWARDS THE END OF THE CONE. THE SHIELDING WILL BE HOLD ON THE SHIELDING RING AND ON THESE PIECES WITH A CONDUCTIVE AND ADHESIVE TAPE.

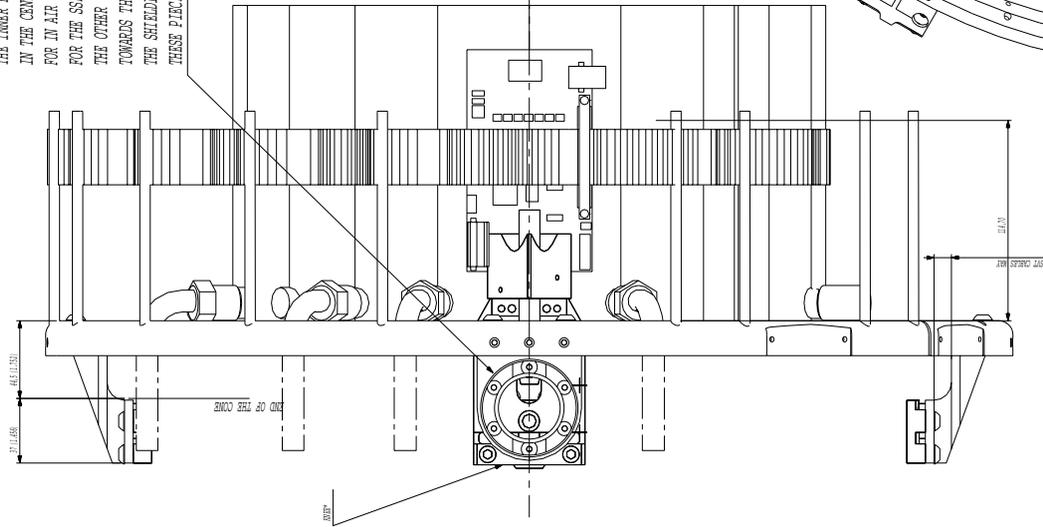


VIEW THROUGH THE CONE (WITHOUT CONE)

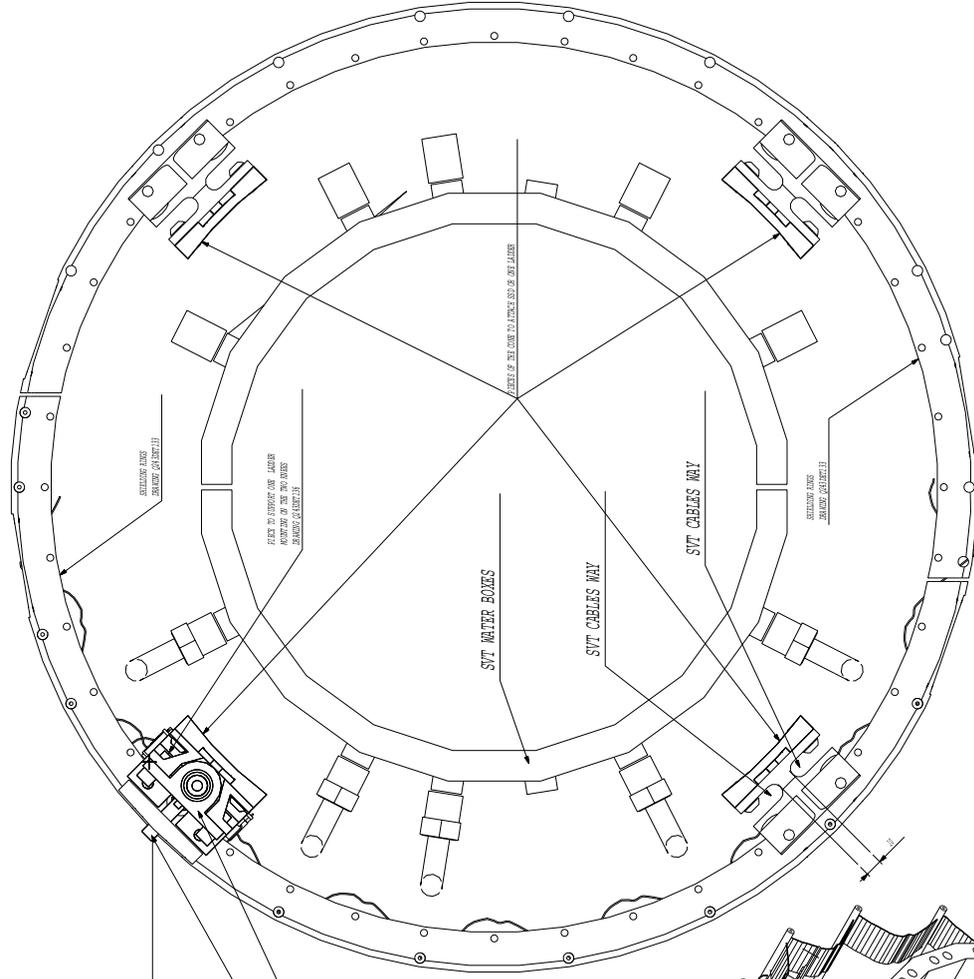

FOR INFORMATION

* NOTES
THE DIMS ARE PRINTING AT EACH ELEMENT OF THE TWO LADDERS
THE DIMS SHOWING THE DIMS AND THE DIMS AND THE DIMS
BEFORE OF THE DIMS AND THE DIMS.



BASE OF DIMS :		SPT DIMS :	
DATE :	REVISION :	DATE :	REVISION :
1	1	1	1
DRAWN BY :		CHECKED BY :	
DATE :		DATE :	
1		1	
STAR			
ONE TWO LADDERS TO THE			
TUBES FOR DETECTION			
SCALE :	1:1	DATE :	24/08/2013
PROJECT :		DESIGNER :	
NO :		DATE :	