- N,S calorimeters are mounted close to the beam pipe a distance of ~7.5m east of the STAR IP.

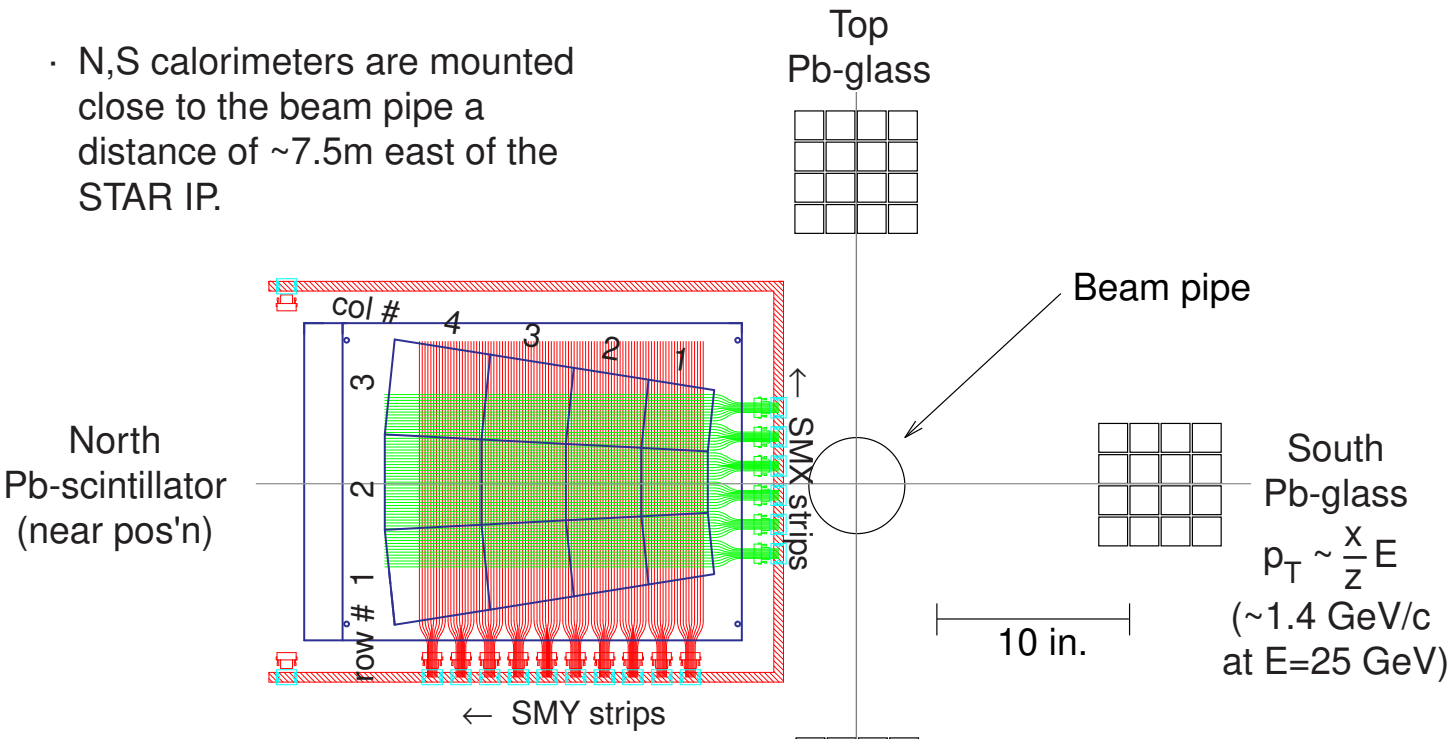

- 12-tower prototype of endcap EMC sampling calorimeter
- preshower detectors
- shower-maximum detector to measure transverse profile
- extensively tested at SLAC

- Pb-glass detectors built by IHEP, Protvino for FNAL E-704
- ~18 radiation lengths
- Cerenkov detector