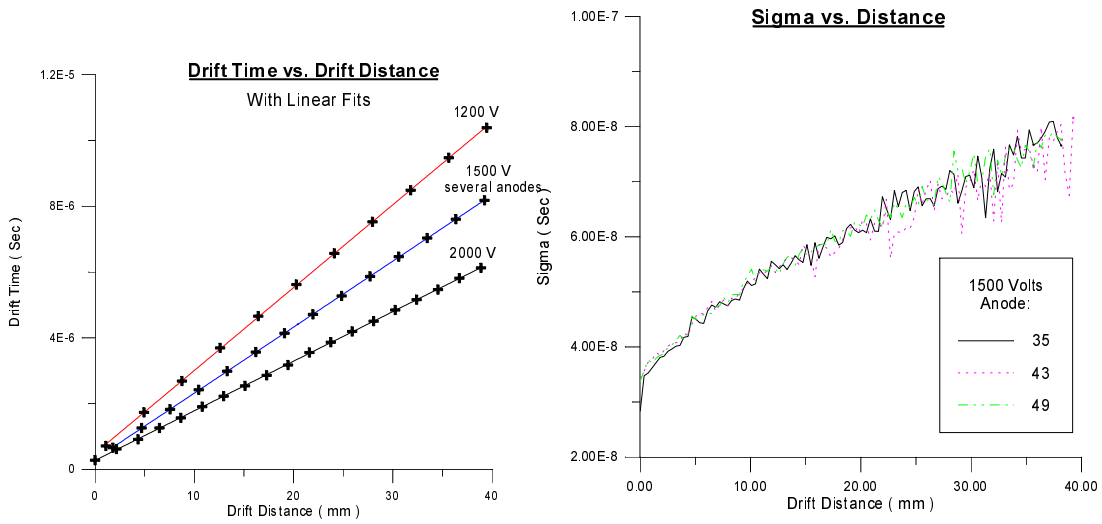

Fig. 1: a.) Drift-time versus drift distance for detector #395 biased with external resistor chain. b.) Measured signal width (σ) as a function of drift distance.

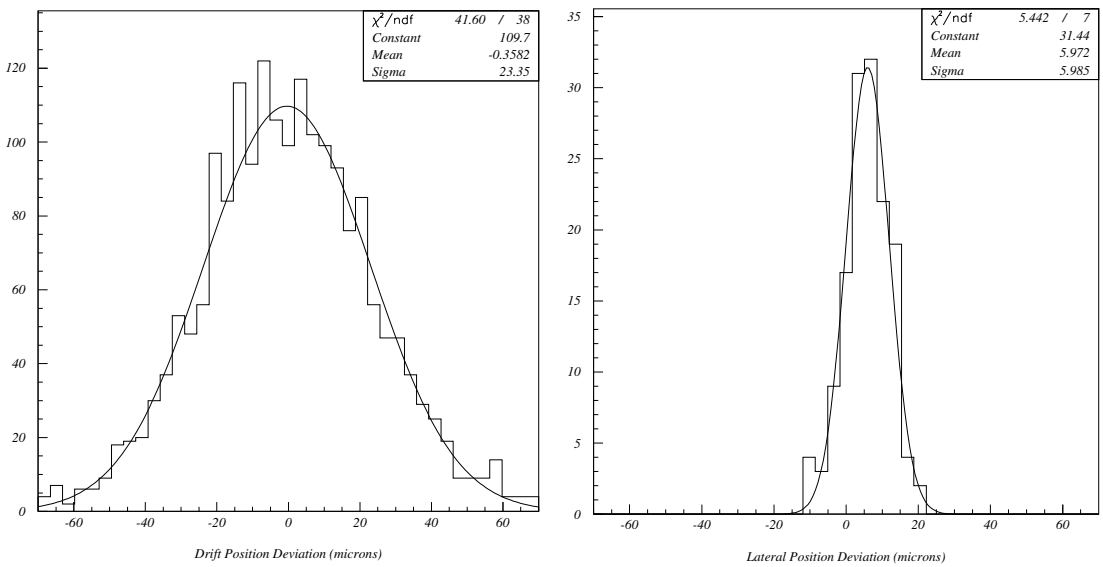

Fig. 2: a.) Precision in the measured drift time after correction for temperature effects. b.) Precision in the measured lateral position