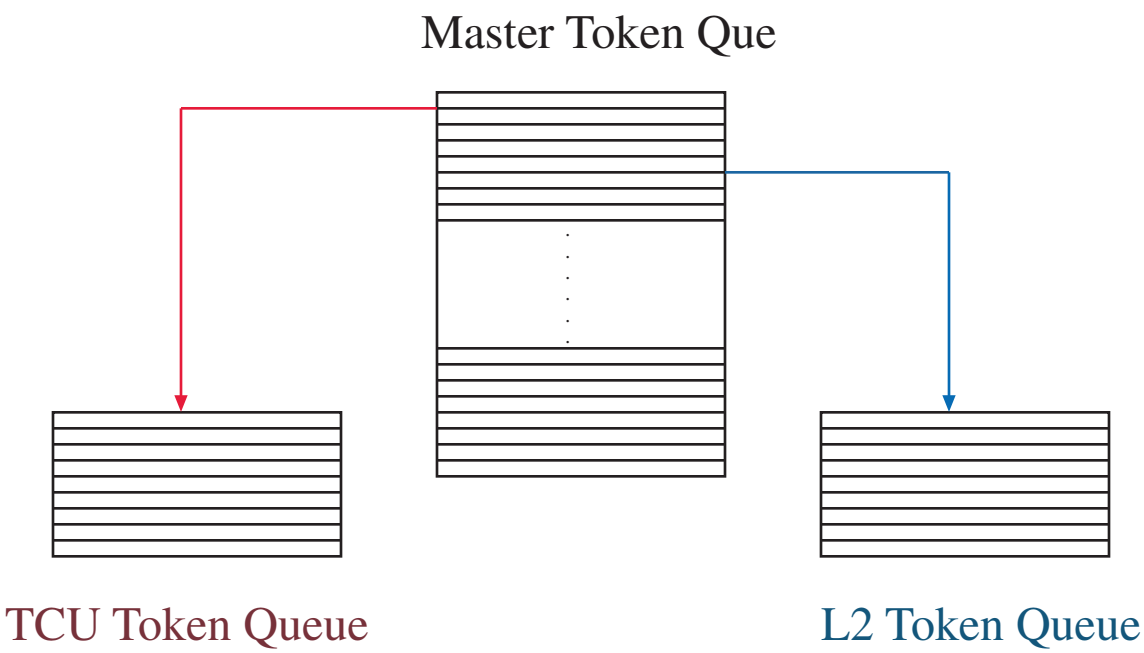

Upon initialization ***x*** tokens are pushed from the Master Token Que into the TCU Token Que, where ***x*** is the amount of available resources at Level 1 (# of CPU's * Memory/CPU).

Upon initialization ***y*** tokens are pushed from the Master Token Que into the L2 Token Que, where ***y*** is the amount of available resources at Level 2 - available resources at L1.